


Removing and installing body brace


Special tools and workshop equipment required

t Torque wrench -V.A.G 1331-

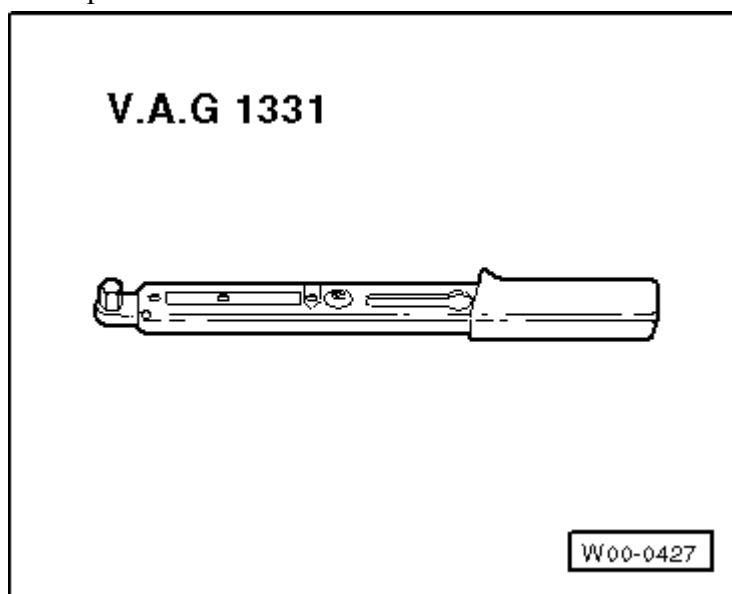


Removing

- Remove plenum chamber cover
→[Rep. gr.50](#).

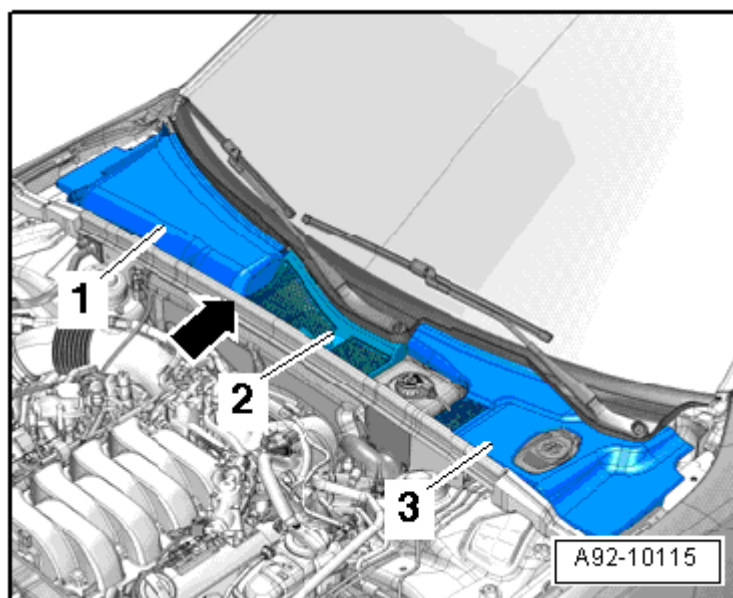

- Remove bolt -1- and guide electronics box off body brace in direction of -arrow-.

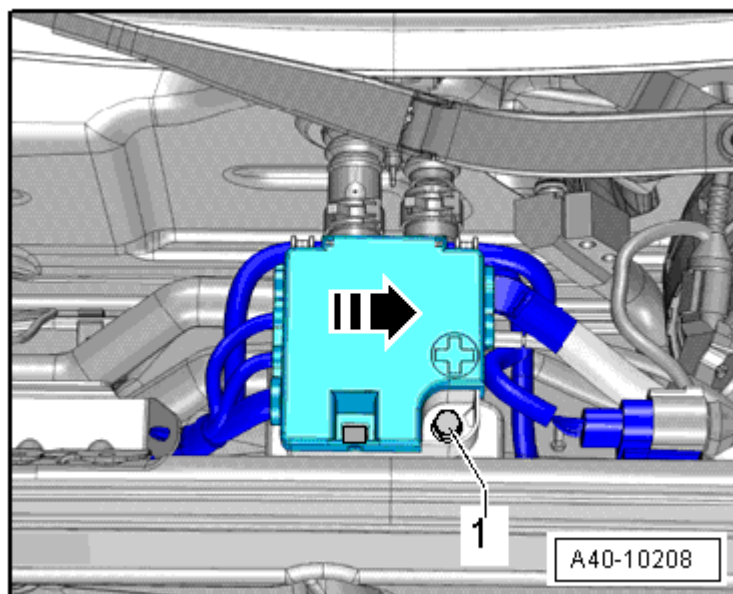

- Unscrew bolts -1- and nuts -2- and take out body brace -3-.

Installing

Installation is carried out in the reverse sequence. Note the following points:

Tightening torques → [Chapter „Exploded view of suspension strut with mounting bracket, shock absorber fork, upper links, body brace“](#)

